





CS

60 HZ STANDARD CAPACITY 4" SUBMERSIBLE PUMPS
VFD COMPATIBLE - UP TO 80 HZ

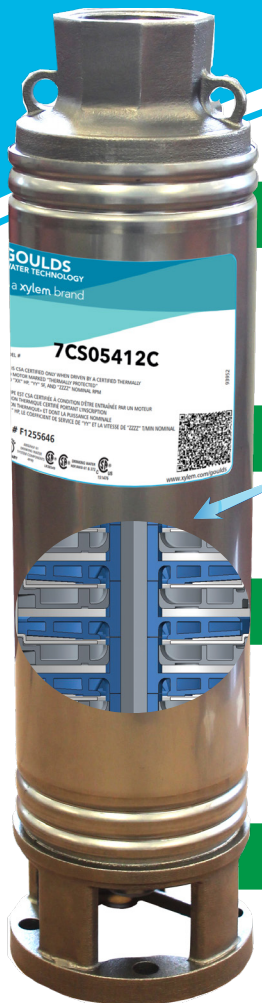

Featuring
**QUAD-LOCK
TECHNOLOGY**



QUAD-LOCK TECHNOLOGY

4 permanently roll-formed grooves provides one of the strongest connections available. Provides the durability and sealing needed in the toughest conditions. Tensile strength tested to exceed the strength of poly and PVC pipe.

FLOATING STACK DESIGN

Over 50 years of field proven design • Superior Sand Handling
AISI 304SS Bowl • Thermoplastic diffuser and impeller

STRENGTH & DURABILITY


Stainless-Steel Construction: Discharge head, motor adapter, casing bowls, cable guard and pump shaft.
Engineered Polymer bearing provides excellent resistance to abrasion and wear.

PEACE OF MIND

100% Performance Tested
NSF/ANSI 61 Annex G • NSF/ANSI 372

WATER END DATA

Model	Order Number	Required HP	Stages	Weight (lbs)	Length (in)
5CS	5CS05R	½	9	8	13.3
	5CS05	½	12	9	15.3
	5CS07	¾	15	11	17.4
	5CS10	1	20	13	20.8
7CS	7CS05R	½	7	6	12.1
	7CS05	½	10	7	14.2
	7CS07	¾	13	8	16.4
	7CS10	1	17	9	19.2
	7CS15	1½	22	12	24.0
10CS	10CS05R	½	8	6	12.2
	10CS05	½	10	7	13.6
	10CS07	¾	14	8	16.4
	10CS10	1	16	9	17.7
	10CS15	1½	17	12	18.8
	10CS20	2	20	13	20.8
13CS	13CS05	½	5	6	10.5
	13CS07	¾	7	7	11.9
	13CS10	1	10	8	14.0
	13CS15	1½	12	9	15.3
	13CS20	2	17	12	18.8
	13CS30	3	21	15	22.7
18CS	18CS07	¾	6	7	12.2
	18CS10	1	8	8	13.9
	18CS15	1½	11	10	16.4
	18CS20	2	14	11	19.0
	18CS30	3	19	15	23.3
25CS	25CS10	1	7	8	13.6
	25CS15	1½	9	9	15.5
	25CS20	2	11	10	17.4
	25CS30	3	15	14	21.1

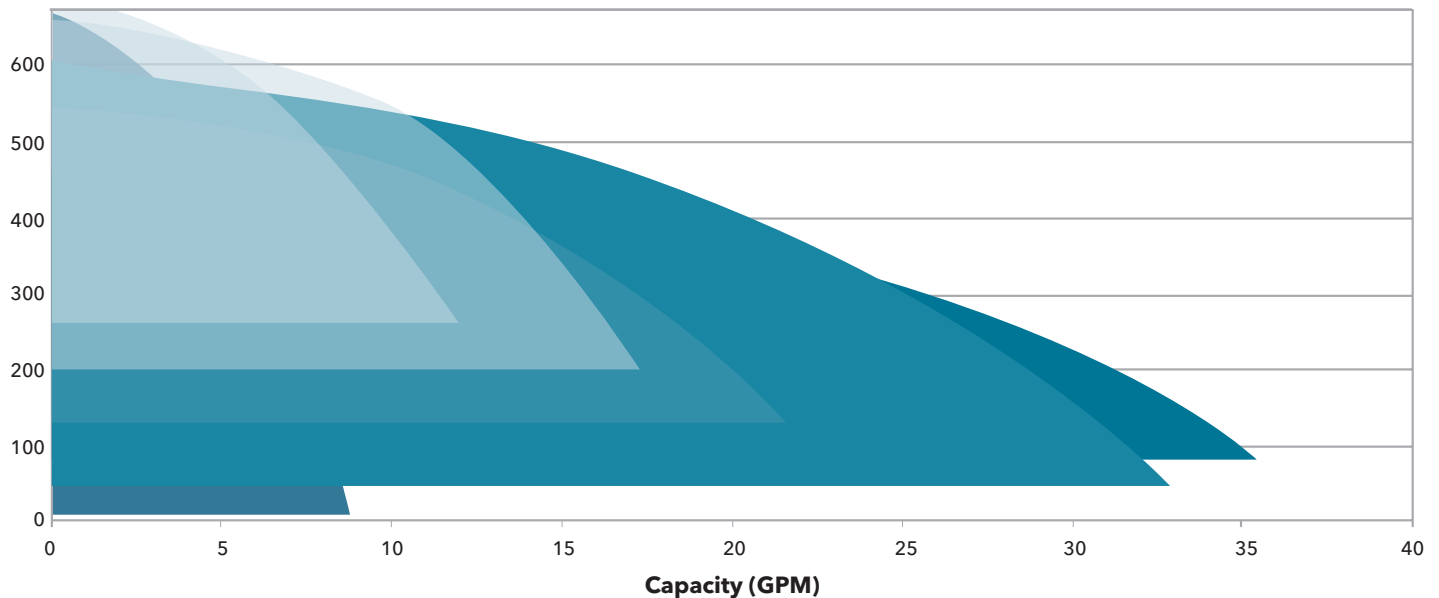

Xylem Inc.
 2881 East Bayard Street Ext., Seneca Falls, NY 13148
 Phone: (866) 325-4210 • Fax: (888) 322-5877
www.xylem.com/goulds

Xylem is a registered trademark of Xylem Inc. or one of its subsidiaries. Goulds is a registered trademark of ITT Manufacturing Enterprises LLC and is used under license. All other trademarks or registered trademarks are property of their respective owners.
 © 2023 Xylem Inc. CSSALES R5 October 2023

Learn more about
 CS pumps:

