



# Pitless Adapters - Clear hole, Snap-on



BA and BA-NL Series

## Features:


- CLEAR CASING DESIGN - no internal obstructions.
- Self-supporting (750 lbs / 300' of 1" iron pipe).
- 300 series stainless steel spring, pivot pin, pull cable, U-bolt, washers, nuts and extra wide backing strap.
- Built-in safety features should spring or cable fall.
- Available in combination with conduit or watertight caps.
- Quality American made bronze or No Lead Brass (NL).
- Easy to install.
- **All BA Series pitless adapters and BA-SC combination units are certified and approved watertight to ASSE Standard #1093-2019 and WSC PAS-97 (2019) standards.**



ASSE Standard #1093-2019 (R2023)  
WSC Standard PAS-97 (2019) (R2023)



Part Number	Description	Nominal Well Size"	Casing O.D."	Drop Pipe"	Ctn Qty
BA4-100NL	Pitless Adapter Only - NO LEAD	4	4 1/2	1	1
BA4-125NL	Pitless Adapter Only - NO LEAD	4	4 1/2	1 1/4	1
BA45-100NL	Pitless Adapter Only - NO LEAD	4 1/2 SDR17	4.95	1	1
BA45-125NL	Pitless Adapter Only - NO LEAD	4 1/2 SDR17	4.95	1 1/4	1
BA5-100NL	Pitless Adapter Only - NO LEAD	5	5 9/16	1	1
BA5-125NL	Pitless Adapter Only - NO LEAD	5	5 9/16	1 1/4	1

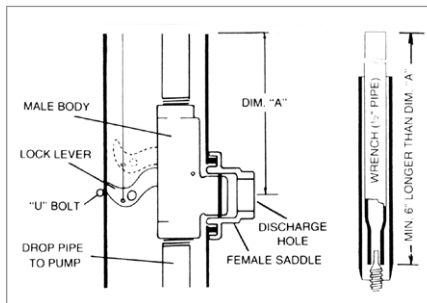

## Installation Instructions

Note: Apply lubricant to o-ring on male member of body & female portion of saddle.

1. Cut 2 1/4" diameter discharge hole in casing with a 2 1/4" hole saw. Attach saddle and U-bolt.
2. File notch in top of casing above discharge hole for alignment and for easy reinstallation if pump must be pulled later.
3. Assemble pump and drop pipe to body and lower into casing with 1" support pipe longer than dim A. Note: Make sure male member snaps completely into female portion of saddle.
4. Remove 1" support pipe and attach cap.