




DeanBennettSupply

DENVER
Winpump
CORPORATION

1-800-621-4291

NON-CODE QC61® GALVANIZED VERTICAL TANKS
NSF/ANSI® STANDARD 61 CERTIFIED LINING
 GALVANIZED VESSEL CERTIFIED TO NSF/ANSI STANDARDS 61-ANNEX G and 372
 75 PSIG MAX. WORKING PRESSURE, 23°C MAX. TEMP

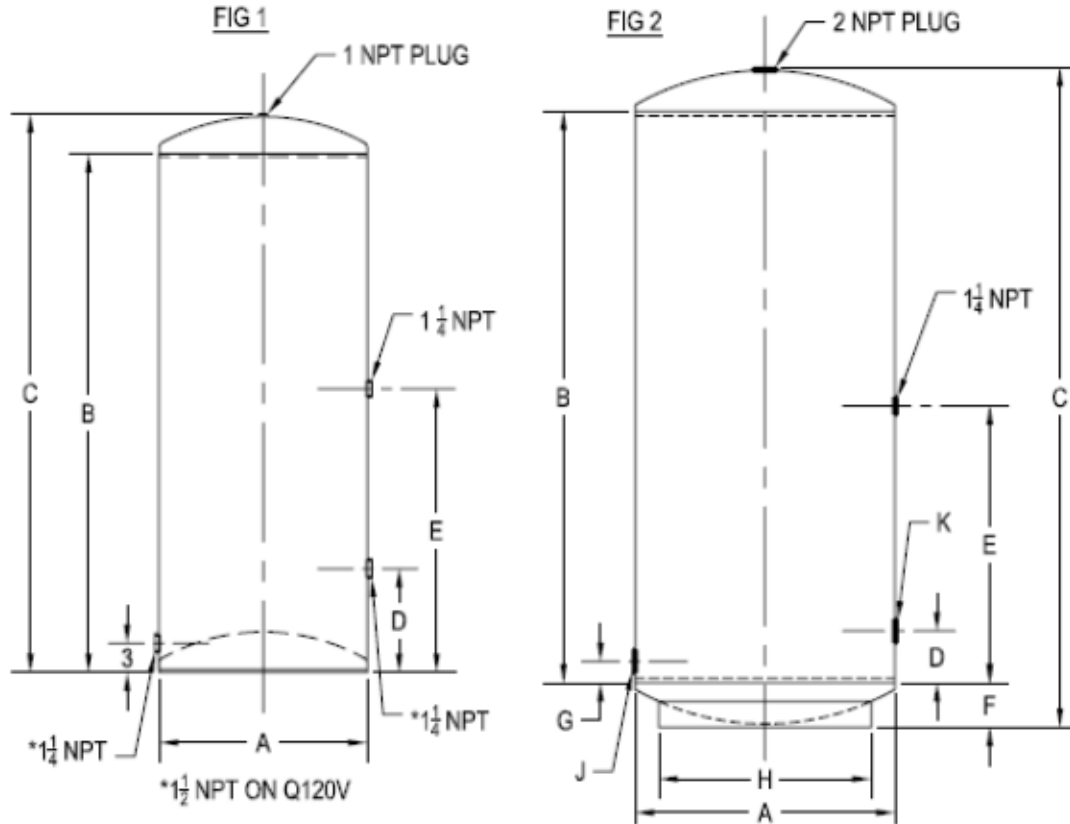

FOR 525 & 900 GALLON TANKS, SEE DATA SHEET 104-COMBOS

MODEL	GALLONS	WEIGHT	FIG#	- NOMINAL DIMENSIONS (INCHES) -								- NPT-	
				A	B	C	D	E	F	G	H	J	K
Q12V	12	27	1	12	24	26-1/2	5	13	-	-	-	-	-
Q21V	21	45	1	16	24	26-7/8	5	13	-	-	-	-	-
Q30V	30	52	1	16	36	38-3/4	8	17	-	-	-	-	-
Q42V	42	71	1	16	48	51	12	26	-	-	-	-	-
Q42VSQ	42	71	1	20	30	33-5/8	8	17	-	-	-	-	-
Q82V	82	114	1	20	60	63	12	33	-	-	-	-	-
Q120V	120	154	1	24	60	64-1/2	12	33	-	-	-	-	-
Q220V	220	303	2	30	66	78	6	32	6	2-1/2	24-1/4	2	2
Q315V	315	416	2	36	66	79-1/2	6	32	7	2-1/2	30-1/2	2	2
Q480VSQ	480	640	2	42	72	87	6	32	7-1/2	2-1/2	36	2	3

T Meets Texas Public Water System (TCEQ)
 66 PSI Max Working Pressure Requirements
 (Documents Available Upon Request)